BOEMA

CHECKLIST PRIOR TO INSTALLATION OF ESPRESSO MACHINE

1. Required bench space:

	Machines:	Grinders:
Minimum Depth:	550mm	360mm
Width (vary):	1 Group: 490mm	220mm
	2 Group: 680mm	
	3 Group: 910mm	
Height:	600 mm	650mm

2. Remove top lid and water inlet hose (braided) located at the back of the machine

3. Holes as required drilled through bench or wall
   Minimum - 50mm to clear

4. Power point within 1 meter of machine - 1 Group - 1Damps Grinders - 1Damps
   2 Groups - 15amps
   3 Groups - 20amps

5. Cold water 1/2 inch male stop cock fitted within 1 meter of machine

6. Drainage - via bucket or into plumbing (gravity fed)

7. Water connected / Power connected
   Our installation fee includes commissioning machine
   This is not possible without water or power.

Recommended:
350 KPA Pressure Limiting valve be fitted in line by your plumber with a half inch male fitting, Left to connect to.

Recommended:
Your warranty requires you to fit the appropriate water filter to suit your local conditions. BOEMA has a complete range of water filters to suit all conditions. The supplied filter may not be suitable in regional areas.

Installations by Technicians include
- Connection to water & power services are provided
- Commissioning of the machine
- Demonstration of the use of the machine
- Operator maintenance demonstration
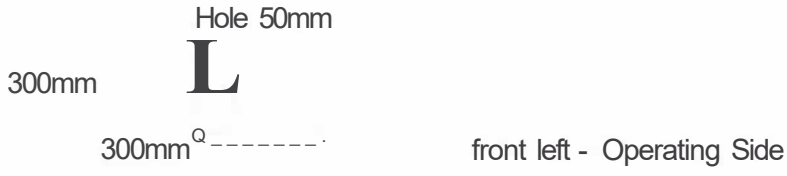
Explanation of workings of the machine which might make the difference between the machine working and not working when you need it most.