

specifications

CL600-3SW


SKOPE Counterline
3 Swing Door Integral Chiller (JD2203V)

CABINET DIMENSIONS

	External	Internal
Height:	725mm*	545mm
Width:	2210mm	1730mm
Depth:	680mm**	565mm
Floor area:	1.50m ²	


* Height excludes castors, legs or optional worktop

**Depth with optional worktop is 700mm

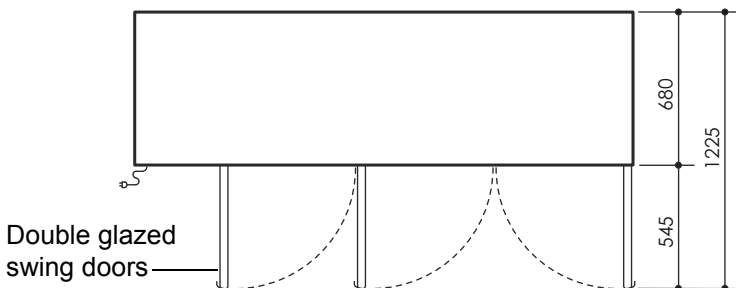

Electronic controller

Optional Worktop

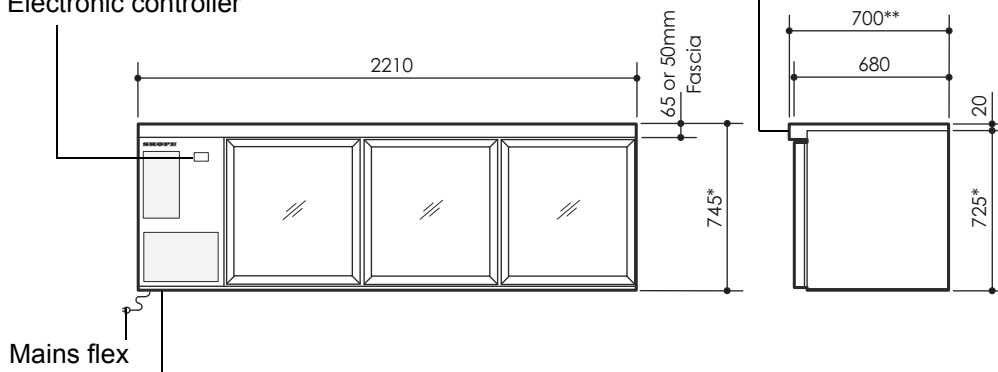

Side mounted integral refrigeration unit

Copyright © 2003 SKOPE Industries Limited

CABINET SPECIFICATIONS

Refrigeration system:	Side mounted, integral refrigeration unit (UE12AAC-173ZC)
Electronic controller:	SKOPE CAREL ir33
Refrigerant:	R134a / 425 g
Nominal capacity:	581 Watts
Cabinet internal volume:	600 litres
Insulation:	42mm polyurethane foam
Cabinet temperature range:	+1°C to +4°C in 40°C ambient
Drainage:	No plumbing required
Electrical:	230-240 Volts a.c. 50 Hz, single phase supply, 3.2 Amps
Internal lighting:	1 x 24W T8 Frosted LED Tube (Ø26 x 1500mm, 5500K) - Switched
Internal door opening size:	3 door openings: 544mm high x 520mm wide
Doors:	Self-closing, double glazed, toughened Low-E safety glass with aluminium extrusion or insulated solid doors
Worktop (optional):	Optional 20mm high stainless steel worktop with 65mm (or 50mm) fascia
Shelves:	Adjustable height, white plastic coated, steel wire shelves - two per door

SKOPE Industries Limited reserve the right to alter specifications without notice.

PSS0158 Rev. 4.0 Mar. 2014



SKOPE INDUSTRIES LIMITED



New Zealand Freephone: 0800 947 5673, Fax: (03) 983 3896. Australian Freephone: 1800 121 535, Freefax: 1800 121 533

Email: enquiry@skope.co.nz Website: www.skope.co.nz