

specifications


SKB900-A Series

Bottom Mount ActiveCore
Two Door Upright Chiller

CABINET DIMENSIONS

	External	Internal
Height:	2005mm* / 2195mm**	1454mm
Width:	1085mm	985mm
Depth:	795mm	602mm
Floor area:	0.86m ² (includes door handle)	

* Height 2005mm without sign (model SKB900-A)
** Height 2195mm with sign (SKB900-AC/ACX)
*** Depth 745mm excludes removable door handle, door lock bracket and rear stand-off.

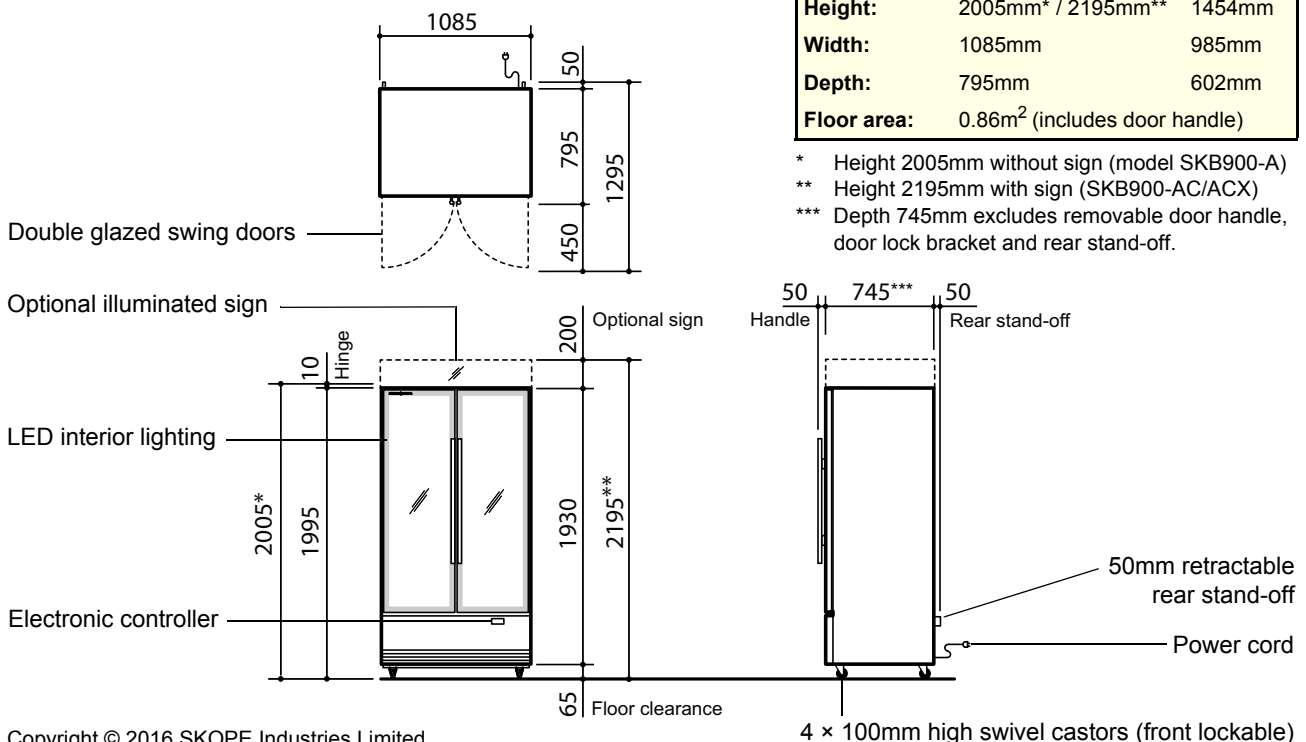

Copyright © 2016 SKOPE Industries Limited

GENERAL SPECIFICATIONS

Temperature range	1°C to 4°C (adjustable up to 15°C)
Climate class	5 (Tested at 43°C)
Doors	Lockable, self-closing, reversible, double glazed, single Low-E, argon filled, toughened safety glass swing doors (hinged LH, RH)
Internal Volume	880 litres
Shelves	8 adjustable height wire shelves: 480mm wide × 520mm deep (model SKB900-ACX has 10 shelves) plus 2 stainless steel bottom shelves: 485mm wide × 515mm deep
Power supply	220-240 Volts a.c. 50 Hz, single phase supply. Supplied with 10 Amp 3-Pin plug
Current draw	4.5 Amps (includes unit 2.9 Amps)
Refrigeration system	Removable ActiveCore bottom mount refrigeration unit (UBHCCI-0001)
Refrigerant	R134a / 380g
Nominal capacity	836 Watts
Controller	Carel S4 electronic controller
Drainage	No plumbing required
Weight	220 kg

INDIVIDUAL SPECIFICATIONS

Model	SKB900-A	SKB900-AC	SKB900-ACX
Part number	MB90GY	MB90BY	MB90BX
Sign	n.a.	200mm high illuminated sign	
Sign lighting	n.a.	1 × 17W T8 LED tube (Ø26mm × 900mm)	
Interior side lights	2 × 20W (1400mm) LED module strip side lights (all models)		
Interior shelf lights	n.a.	n.a.	10 × 7W LED module strip shelf lights

SKOPE Industries Limited reserve the right to alter specifications without notice.

PSS0462 Rev.2.0 April 2017



SKOPE INDUSTRIES LIMITED

Australian Freephone: 1800 121 535, New Zealand Freephone: 0800 947 5673

Email: skope@skope.co.nz, Website: www.skope.com

