


BLAST CHILLER / FREEZER 3 GN 1/1 (CHILLING CAPACITY +90°/+3°C KG 8 - FREEZING CAPACITY +90°/-18°C KG 5)

Model: PCF031AFG

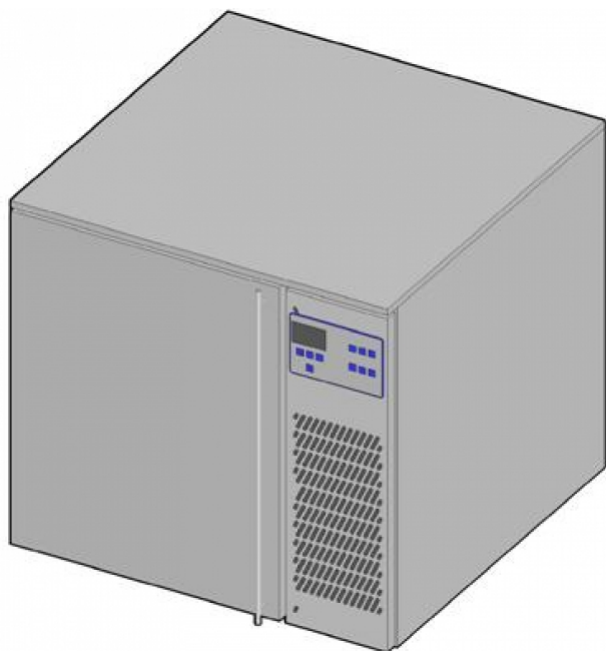

General characteristics

THE SIMPLE-SERIES CONTROLLER IS CONCEIVED SPECIFICALLY FOR CUSTOMERS WHO WANT A UNIT THAT IS SIMPLE TO OPERATE BUT STILL GIVES THEM FULL CONTROL. Easy to use it serves to blast chill or freeze the product either on a time basis or by monitoring the product's core temperature by means of the needle probe. Defrosting can be started by the user only when it is actually needed, thus meeting the need for increasingly energy efficient equipment.


Technical/functional Characteristics

- Monoblock construction.
- Internal and external in AISI 304 18/10 stainless steel.
- Capacity: 3 shelves.
- Core probe.
- External satinated finishing type SCOTCH –BRITE.
- CFC and HCFC-free polyurethane insulation with density 42 kg/m3.
- Ecological refrigerant R404A.
- Automatic evaporation of the condensate without waste of electric energy.
- Magnetic perimetral seals.
- Slot-in type shelves supports made of stainless steel, easily extractable without any tools to foster cleaning.
- Climatic class ST (ambient temp. + 38°C).
- Power supply 230 / 1 Ph / 50 Hz.
- Full CE compliance.

TECHNICAL DATA

DIMENSIONS	
WIDTH (MM)	560
DEPTH (MM)	735
HEIGHT (MM)	520
CAPACITY	3 GN1/1
DIMENSIONE CELLA (MM)	330x615x275
TEMPERATURA DI LAVORO	-

ELECTRIC CONNECTION (V~/HZ)	220
COLD WATER CONNECTION (Ø)	-
DRAIN (Ø)	-
POTENZA FRIGORIFERO	487
ELECTRIC POWER (KW)	587
CAPACITA' ABBATTIMENTO +90/+3 °C (KG)	-
CAPACITA' CONGELAMENTO +90/-18 °C (KG)	-

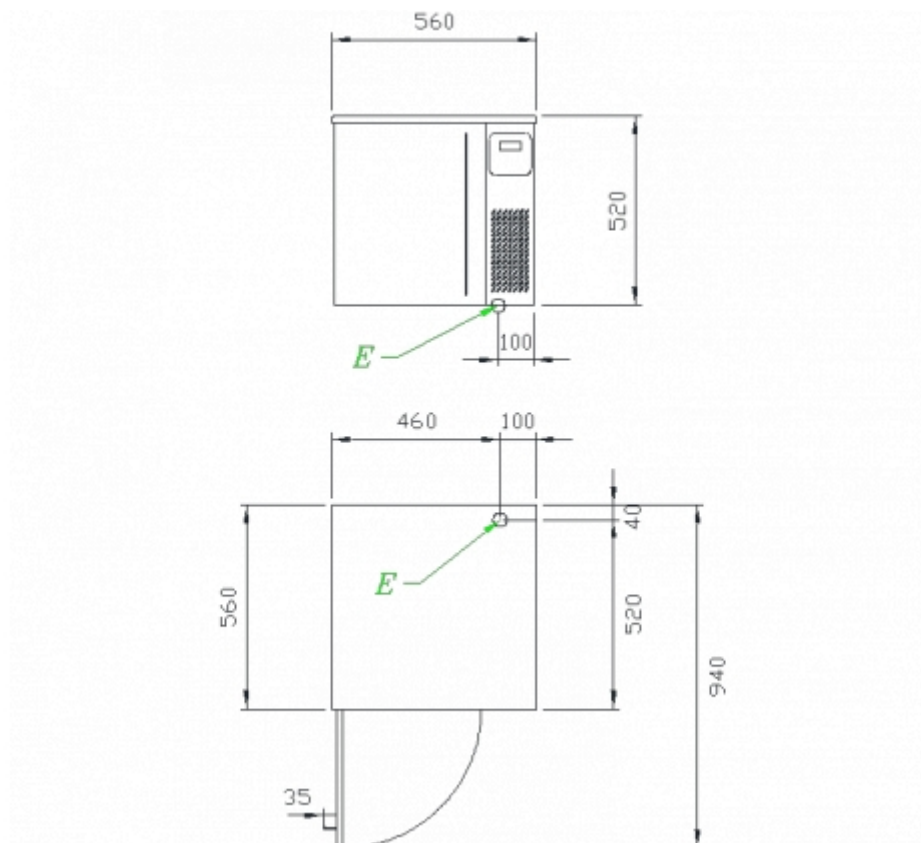

ACCESSORIES