


GM1000LCAS | Cassette Flat Glass Door LED Upright Display Chiller

Vertical Displays & Storage

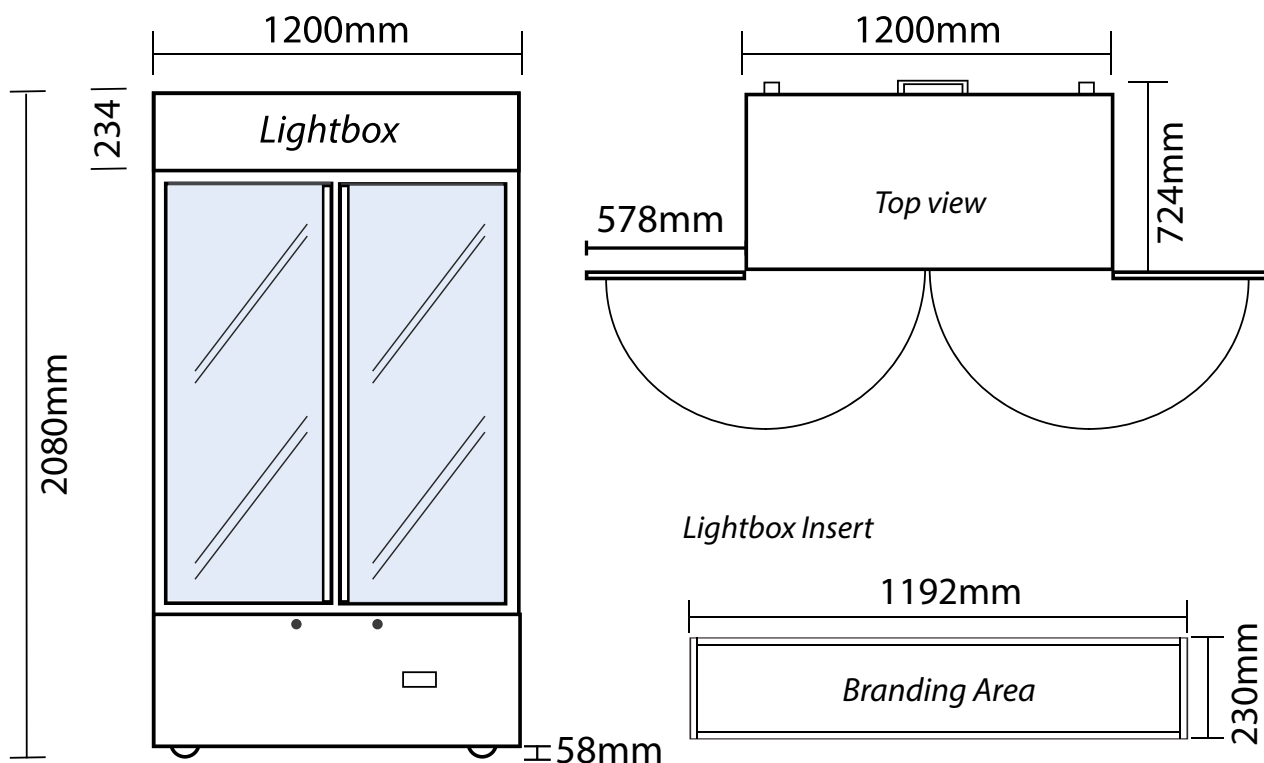

SPECIFICATIONS

Part Number (black)	GM1000LBCAS
Part Number (white)	GM1000LCAS
Capacity	880L
Temperature range	+2 to +5°C
Max. Ambient Temp.	38°C, 60% RH
Refrigerant Power	520W
Current	2.3A
Gross Weight	188kg
Air-Circulation	Fan Forced with Even Air Channel
Refrigerant	R290
Plug supplied	Yes, 1 x 10A
Display Light Box	Yes
Internal Light	LED, 2 x full length ultra-bright LED strips
Door Type	Double glazed safety glass door
Door Shape	Flat
Self-Closing Door	Yes
Door Lock	Yes
No. of doors	2
Temp. Controller	Digital
Castors	Yes, swivel (plus floor stabiliser adjustable raisers)
No. of shelves	10, adjustable (5+5)
Colour	White or Black
Warranty	2 Years, Parts & Labour

DIMENSIONS

	External (mm)
Height	2080
Width	1200
Depth	724


BROMIC PTY Ltd reserve the right to alter specifications without notice.

GM1000LCAS | Cassette Flat Glass Door LED Upright Display Chiller


Vertical Displays & Storage




REMOVABLE CASSETTE - IDEAL FOR SERVICING INFIELD, DYNAMIC COOLING SYSTEM




Disconnect black plug from back of unit




Disconnected black plug from controller



Turn lever left to unlock



Turn lever right to unlock



Slide cassette towards you and remove