

218 Woodpark Road Smithfield, NSW 2164 Tel: 02-8798-5061/5283 Fax: 02-8798-5707 www.skipio.com.au

TOP MOUNT S SERIES

____ FEATURES / BENEFITS ____

HIGH-DENSITY POLYURETHANE INSULATION

The entire cabinet structure are foamed-in-place using high density, CFC free polyurethane insulation.

HOT GAS CONDENSATE SYSTEM

Through SKIPIO's creative innovation, the condensate system surfaces have been specially treated to resist corrosion. This not only increases efficiency without the risk of refrigerant leakage from corrosion, but thoroughly prevents the overflow of condensate water.

EFFICIENT REFRIGERATION SYSTEM

SKIPIO's refrigerators are designed with oversized and balanced (CFC Free R-134A) refrigeration systems. These include efficient evaporators and condensers for faster cooling and greater efficiency.

EXTERIOR & INTERIOR OF CABINET CONSTRUCTION

Stainless steel exterior (galvanized steel top, bottom, and back) and stainless steel with AL inside walls and door liners. It guarantees the utmost in cleanliness and long product life. Unlike other companies' products, the sharp corners and edges have been rounded to reduce the risk of injury.

ERGONOMICALLY DESIGNED DOORS

Customers' fatigue fades away with easy grip handles and doors that open effortlessly. These features along with self-closing doors make this the ultimate choice in customer convenience.

DIGITAL TEMPERATURE CONTROL SYSTEM

It provides precise and constant temperature. This level of precision allows the displayed foods to remain fresh over an extended period of time.




Model	Swing Door	Capacity (Liters)	Shelves	Compressor (HP)	Amps (A)	Net Weight (Kg)	L X D X H (mm)
SRT45-4	4	1210	6	1/3	3.5	142	1260 x 850 x 1926

SRT45-4

SRT45-4

Model: SRT45-4

SPEC SHEET	SRT45-4			
Classification	Refrigerator			
Cabinet Dimension (WxDxH mm)	1260x850x1926			
Capacity (Liters)	1210			
Inner Temperature	1°C~8°C			
Doors	4			
Number of Shelves	6			
Refrigent	R-134a			
Compressor (Hp)	1/3			
Cooling Type	Fan cooling type			
Insulation Type	Polyurethane / Cyclopentane + CFC Free			
Temperature Control Type	Digital			
Amps (A)	3.5			
Voltage (V/Hz/Ph)	240V 50Hz 1Ph			
Power (W)	366			
Weight (Kg)	142			

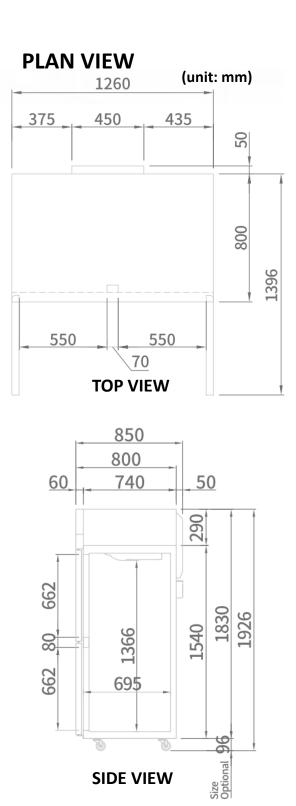

WARRANTY PARTS & LABOUR

ADD: 218 WOODPARK ROAD SMITHFIELD NSW 2164

. TEL: 02-8798-5061/5283/5581

FAX:02-8798-5707

CEC

Collegester Second

SKIPIO



(UL)

 \otimes

MEPS

NSF 🕲 🕕 CE 📖

ISO14001