## specifications


# Refrigeration

### RF7.UPF.1.SD

ReFlex Series, 1 Door (Solid), Upright Freezer

Project:

Item No:

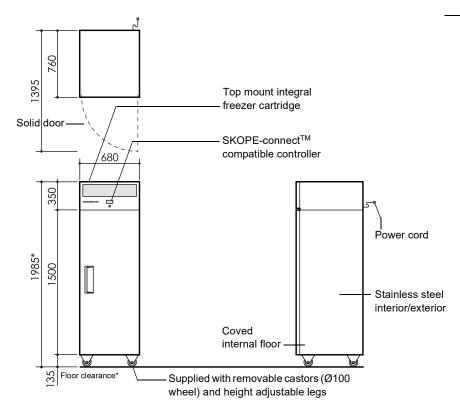

#### CABINET

Doors 1 × self-closing, lockable, reversible, solid swing door. Supplied RH

Internal door opening 1 × door openings: 1375mm high × 555mm wide

Shelves 5 × adjustable height shelves: 540mm wide × 530mm deep

Worktop n.a.

Material 304 AISI stainless steel interior and exterior

#### **PERFORMANCE**

Max. ambient temp. 40°C

Temperature range -21°C to -18°C (adjustable with SKOPE-connect -26°C to -12°C)

GEMS class 5L

GEMS energy consumption 7.40 kWh/24h

GEMS annual running cost \$811 p.a. (@ \$0.30/kWh)

#### **ELECTRICAL**

Electrical safety climate class | 5

Interior lighting
Power cord
Power supply
Current draw

1 × 1200mm, 12W LED light (door activated)
Supplied with 2.3m, 10 Amp plug and lead
220-240 Volts a.c. 50 Hz, single phase supply
4.0 Amps (includes unit 3.9 Amps)

#### REFRIGERATION

Controller | SCS Connect (SKOPE-connect<sup>TM</sup> compatible)

Connectivity interface Bluetooth® wireless technology

Refrigeration system Top mounted, integral, removable freezer cartridge (part number

UTKDNI-0019)

Refrigerant R290 / 94g (natural refrigerant)

Nominal capacity 550 Watts

Heat rejection (Avg/peak) 310 Watts/430 Watts
Drainage No plumbing required

SKOPE Industries Limited reserve the right to alter specifications without notice. Copyright © 2019 SKOPE Industries Limited

#### SKOPE INDUSTRIES LIMITED

Australian Freephone: 1800 121 535, New Zealand Freephone: 0800 947 5673

Email: skope@skope.com, Website: www.skope.com

ר	IN	ΛEΝ	JOI	$\sim$	21

DIIVILIACIOIAC			
	External	Internal	
Height	1985mm*	1395mm	
Width	680mm	560mm	
Depth	760mm	600mm	
Floor area	0.52m <sup>2</sup>		
Weight	122kg		
Gross volume	469L		
Net volume	363L		

<sup>\*</sup> With supplied castors fitted. See height variation below

Height variation		
Supplied castors	1985mm	
Supplied height adjustable legs	1995-2035mm	
No castors or legs	1850mm	

Dimensional tolerances				
Before installing this cabinet allow the following dimensional tolerances:				
Linear dimensions	Overall cabinet dimensions			
Less than 1 metre	±5mm			
More than 1 metre	-5mm to +10mm			
	Length of multiple cabinets			
	At each joint	At each end wall		
Less than 1 metre	±5mm	+15mm		
More than 1 metre	-5mm to +10mm	+15mm		

Ventilation requirements	
Тор	300mm
Sides	Not required
Back	Not required
Bottom	Not required

PSS0590 Rev. 2.21 Aug. 2020



