specifications


RF7.UPR.2.SD

ReFlex Series, 2 Door (Solid), Upright Fridge



Project:

Item No:

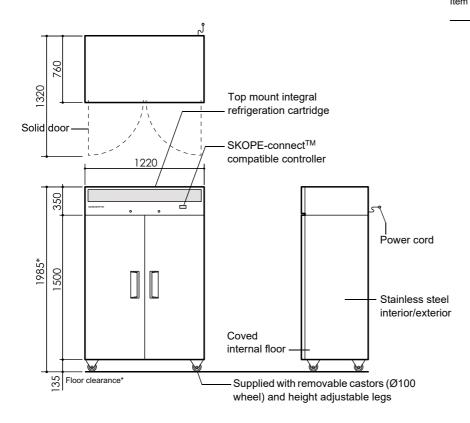

CABINET

Model ID RF7.UPR.2.SD SKOPE ID RF7UPR2-SCTP-SD

Doors 2 × self-closing, lockable, solid swing doors. LH, RH Internal door opening 2 × door openings: 1375mm high × 495mm wide

Shelves 10 × adjustable height shelves: 530mm wide × 530mm deep

Worktop n.a.

Material 304 AISI stainless steel interior and exterior

PERFORMANCE

Max. ambient temp. 40°C

Temperature range 1°C to 4°C (adjustable with SKOPE-connect -2°C to 10°C)

Total energy consumption 3.91 kWh/24hr

ELECTRICAL

Climate class 5 (40°C/40% RH)

Interior lighting2 × 1200mm, 12W LED lights (door activated)Power cordSupplied with 2.9m, 10 Amp plug and leadPower supply220-240 Volts a.c. 50 Hz, single phase supply

Current draw 2.0 Amps (includes unit 1.5 Amps)

REFRIGERATION

Controller SCS Connect (SKOPE-connectTM compatible)

Connectivity interface Bluetooth® wireless technology

Refrigeration system Top mounted, integral, removable refrigeration cartridge (part number

UTKCNI-0018)

Refrigerant R290 / 90g (natural refrigerant)

Nominal capacity 650 Watts

Heat rejection (Avg/peak) 165 Watts/205 Watts
Drainage No plumbing required

SKOPE Industries Limited reserve the right to alter specifications without notice. Copyright © 2019 SKOPE Industries Limited

SKOPE INDUSTRIES LIMITED

Australian Freephone: 1800 121 535, New Zealand Freephone: 0800 947 5673

Email: skope@skope.com, Website: www.skope.com

\neg	IN	ЛF	N	\sim	NI	
J	HΛ	/16	IV		 IV	

DIMENSIONS		
	External	Internal
Height	1985mm*	1395mm
Width	1220mm	1100mm
Depth	760mm	600mm
Floor area	0.93m ²	J
Weight	159kg	
Internal volume	920 litres	

^{*} With supplied castors fitted. See height variation below

Height variation	
Supplied castors	1985mm
Supplied height adjustable legs	1995-2035mm
No castors or legs	1850mm

Dimensional tolerances		
Before installing this cabinet allow the following dimensional tolerances:		
Overall cabinet dimensions		
±5mm		
ore than 1 metre -5mm to +10mm		
Length of multiple cabinets		
At each joint	At each end wall	
±5mm	+15mm	
-5mm to +10mm	+15mm	
	Overall cabinet d ±5mm -5mm to +10mm Length of multipl At each joint ±5mm	

Ventilation requirements		
Тор	300mm	
Sides	Not required	
Back	Not required	
Bottom	Not required	

PSS0589 Rev. 2.0 Mar. 2020



