

specifications

Refrigeration

RF6.UBF.1.SD

ReFlex Series, 1 Door (Solid), Underbench Freezer



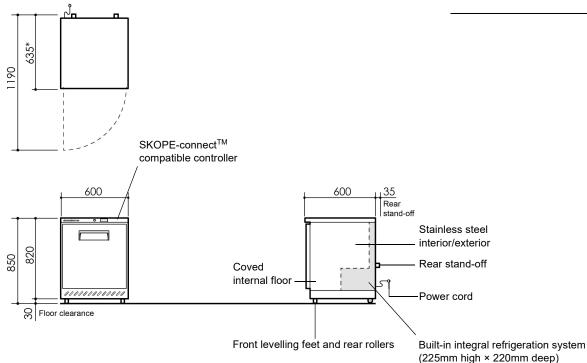

CABINET

Door 1 x self-closing, lockable, reversible, solid swing door (hinged RH)

Internal door opening 1 × door opening: 645mm high × 485mm wide

Shelves 3 × shelves: 2 × adjustable height and 1 × floor mounted.

Top and middle adjustable height shelves: 480mm wide × 350mm deep

Bottom floor mounted shelf: 480mm wide × 180mm deep

Worktop n.a.

Material 304 AISI stainless steel interior and exterior

PERFORMANCE

Max. ambient temp. 30°C

Temperature range | -21°C to -18°C (adjustable with SKOPE-connect -26°C to -12°C)

GEMS class 4L

GEMS energy consumption | 4.84 kWh/24h

GEMS annual running cost \$530 p.a. (@ \$0.30/kWh)

ELECTRICAL

Electrical safety climate class | 4 | Interior lighting | n.a

Power cord Supplied with 2.0m, 10 Amp plug and lead Power supply 220-240 Volts a.c. 50 Hz, single phase supply

Current draw 1.5 Amps

REFRIGERATION

Controller | SCS Connect (SKOPE-connectTM compatible)

Connectivity interface Bluetooth® wireless technology Refrigeration system Refrigerant Bluetooth® wireless technology Built-in, integral, freezer system R290 / 45g (natural refrigerant)

Nominal capacity 250 Watts

Heat rejection (Avg/peak) 200 Watts/205 Watts
Drainage No plumbing required

 ${\sf SKOPE\ Industries\ Limited\ reserve\ the\ right\ to\ alter\ specifications\ without\ notice.\ Copyright\ @\ 2019\ SKOPE\ Industries\ Limited\ and\ alter\ specifications\ without\ notice.}$

DIMENSIONS | External | 850mm

 Height
 850mm
 655mm

 Width
 600mm
 495mm

 Depth
 635mm*
 450mm

 Floor area
 0.38m²

 Weight
 52kg

 Gross volume
 146 L

 Net volume
 94 L

Depth 635mm includes 35mm rear stand-off

| Dimensional tolera | nces | |
|------------------------------------|-----------------------------|--------------------|
| Before installing this tolerances: | cabinet allow the fol | lowing dimensional |
| Linear dimensions | Overall cabinet dimensions | |
| Less than 1 metre | ±5mm | |
| More than 1 metre | -5mm to +10mm | |
| | Length of multiple cabinets | |
| | At each joint | At each end wall |
| Less than 1 metre | ±5mm | +15mm |
| More than 1 metre | -5mm to +10mm | +15mm |

| Ventilation requirements | | |
|--------------------------|-----------------------------------|--|
| Тор | Not required | |
| Sides | 50mm each side | |
| Back | 35mm (provided by rear stand-off) | |
| Bottom | 30mm (provided by feet) | |



PSS0664 Rev. 1.2 Aug. 2020

Internal