


# specifications

## RF6.UBR.1.SD

ReFlex Series, 1 Door (Solid), Underbench Fridge

Project: \_\_\_\_\_

Item No: \_\_\_\_\_

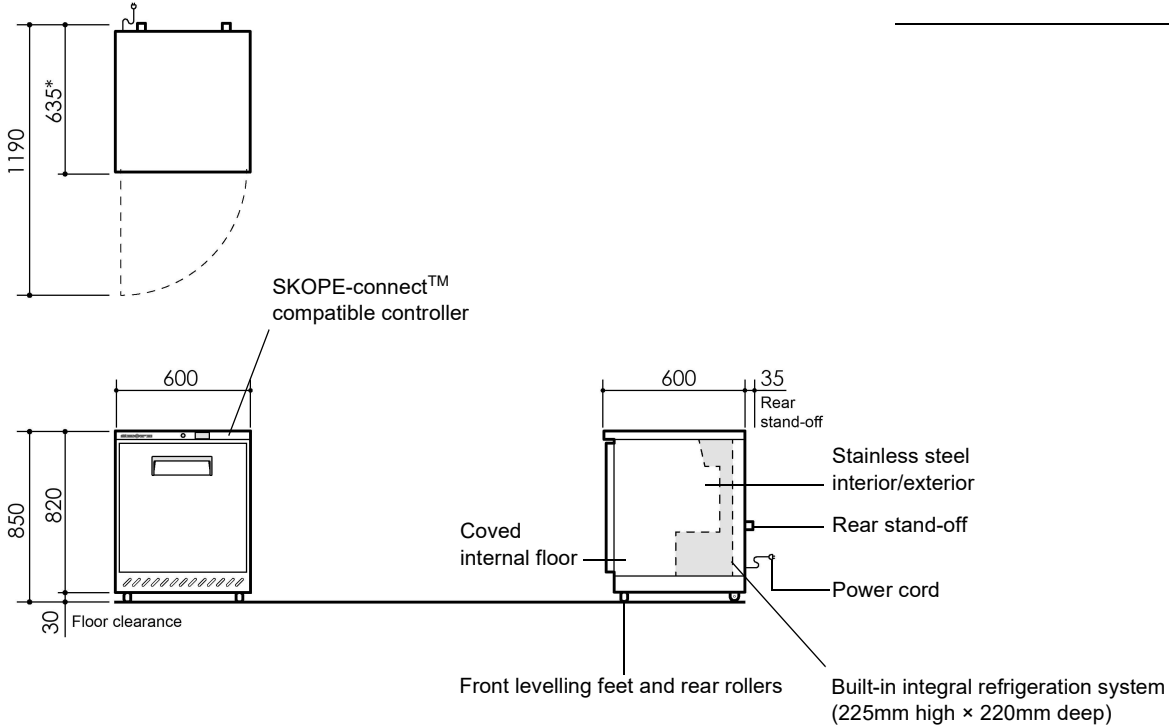

| CABINET                         |   |
|---------------------------------|---|
| Door                            | 1 × self-closing, lockable, reversible, solid swing door (hinged RH)  |
| Internal door opening           | 1 × door opening: 645mm high × 485mm wide   |
| Shelves                         | 3 × shelves: 2 × adjustable height and 1 × floor mounted.<br>Top and middle adjustable height shelves: 480mm wide × 350mm deep<br>Bottom floor mounted shelf: 480mm wide × 180mm deep |
| Worktop                         | n.a.  |
| Material                        | 304 AISI stainless steel interior and exterior  |
| PERFORMANCE                     |   |
| Max. ambient temp.              | 30°C  |
| Temperature range               | 1°C to 4°C (adjustable with SKOPE-connect 1°C to 15°C)  |
| GEMS class                      | 4M1   |
| GEMS energy consumption         | 1.30 kWh/24h  |
| GEMS annual running cost        | \$143 p.a. (@ \$0.30/kWh)   |
| ELECTRICAL                      |   |
| Electrical safety climate class | 4   |
| Interior lighting               | n.a.  |
| Power cord                      | Supplied with 2.0m, 10 Amp plug and lead  |
| Power supply                    | 220-240 Volts a.c. 50 Hz, single phase supply   |
| Current draw                    | 1.0 Amps  |
| REFRIGERATION                   |   |
| Controller                      | SCS Connect (SKOPE-connect™ compatible)   |
| Connectivity interface          | Bluetooth® wireless technology  |
| Refrigeration system            | Built-in, integral, refrigeration system  |
| Refrigerant                     | R600a / 45g (natural refrigerant)   |
| Nominal capacity                | 200 Watts   |
| Heat rejection (Avg/peak)       | 55 Watts/60 Watts   |
| Drainage                        | No plumbing required  |

| DIMENSIONS   |                    |          |
|--------------|--------------------|----------|
|              | External           | Internal |
| Height       | 850mm              | 655mm    |
| Width        | 600mm              | 495mm    |
| Depth        | 635mm*             | 430mm    |
| Floor area   | 0.38m <sup>2</sup> |          |
| Weight       | 50kg               |          |
| Gross volume | 139 L              |          |
| Net volume   | 80 L               |          |

\* Depth 635mm includes 35mm rear stand-off

| Dimensional tolerances   |                             |                  |
|--|-----------------------------|------------------|
| Before installing this cabinet allow the following dimensional tolerances: |                             |                  |
| Linear dimensions  | Overall cabinet dimensions  |                  |
| Less than 1 metre  | ±5mm                        |                  |
| More than 1 metre  | -5mm to +10mm               |                  |
|  | Length of multiple cabinets |                  |
|  | At each joint               | At each end wall |
| Less than 1 metre  | ±5mm                        | +15mm            |
| More than 1 metre  | -5mm to +10mm               | +15mm            |

| Ventilation requirements |                                   |
|--------------------------|-----------------------------------|
| Top                      | Not required                      |
| Sides                    | 50mm each side                    |
| Back                     | 35mm (provided by rear stand-off) |
| Bottom                   | 30mm (provided by feet)           |

SKOPE Industries Limited reserve the right to alter specifications without notice. Copyright © 2019 SKOPE Industries Limited

### SKOPE INDUSTRIES LIMITED

Australian Freephone: 1800 121 535, New Zealand Freephone: 0800 947 5673

Email: skope@skope.com, Website: www.skope.com

PSS0663 Rev. 1.3 Aug. 2020

