


specifications

SKT1300N-A Series

ActiveCore Series, 2 Door (Glass), Upright Fridge

Project: _____

Item No: _____

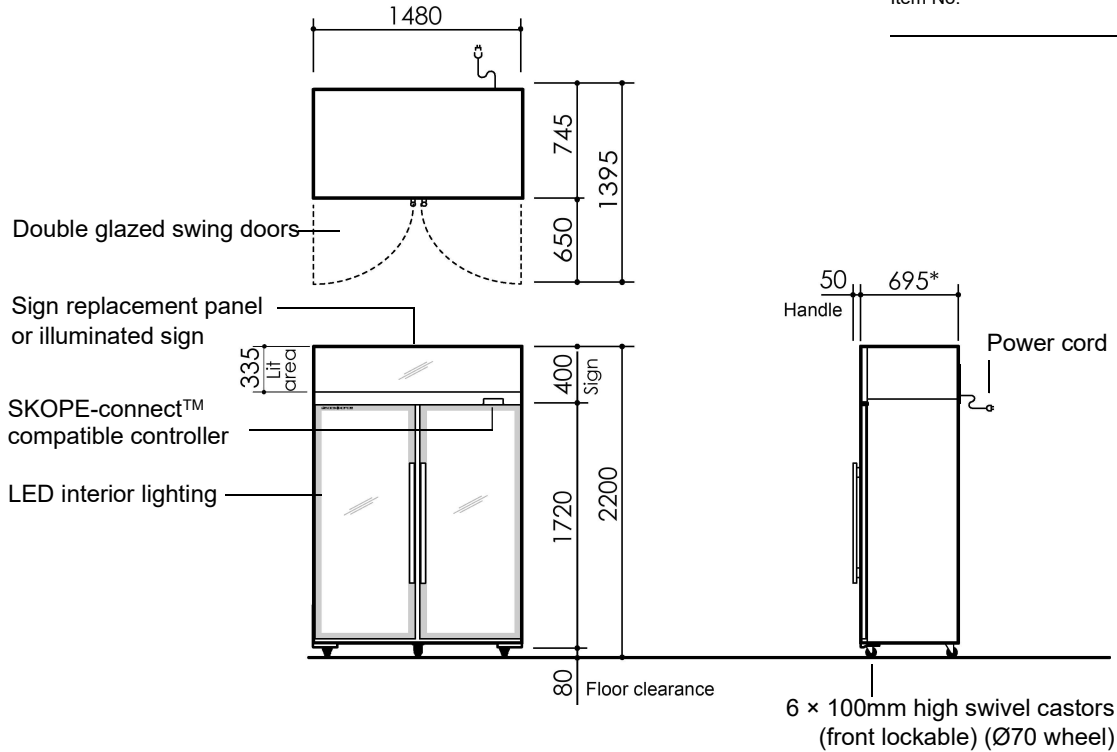

| CABINET | | |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------|---------------------------|
| Model ID | SKT1300N-A | SKT1300N-AC |
| Doors | 2 x self-closing, double glazed, single Low-E, lockable, argon filled, toughened safety glass swing doors (hinged LH, RH) | |
| Internal door opening | 2 x door openings: 1570mm high x 645mm wide | |
| Shelves | 10 x adjustable height wire shelves: 677mm wide x 470mm deep | |
| Sign | Sign replacement panel | Illuminated sign |
| Material | Powdercoat galvanized steel or stainless steel interior & exterior | |
| PERFORMANCE | | |
| Max. ambient temp. | 40°C | |
| Temperature range | 1°C to 4°C (adjustable via SKOPE-connect 1°C to 15°C) | |
| GEMS class | M1 | |
| GEMS energy consumption | 4.21 kWh/24h | 4.43 kWh/24h |
| GEMS annual running cost | \$461 p.a. (@ \$0.30/kWh) | \$486 p.a. (@ \$0.30/kWh) |
| ELECTRICAL | | |
| Electrical safety climate class | 5 | |
| Interior side lighting | 2 x 1400mm, 15W LED | 2 x 1400mm, 15W LED |
| Interior shelf lighting | n.a. | n.a. |
| Sign lighting | n.a. | 1 x 1400mm, 15W LED |
| Power cord | Supplied with 2.3m, 10 Amp plug and lead | |
| Power supply | 220-240 Volts a.c. 50 Hz, single phase supply | |
| Current draw | 3.0 Amps (includes unit 2.6 Amps) | |
| REFRIGERATION | | |
| Controller | SCS Connect (SKOPE-connect™ compatible) | |
| Connectivity interface | Bluetooth® wireless technology | |
| Refrigeration system | Top mounted, integral, removable ActiveCore refrigeration unit (UTHCNI-0010) | |
| Refrigerant | R290 / 99g (natural refrigerant) | |
| Nominal capacity | 390 Watts | |
| Heat rejection (Avg/peak) | 175 Watts/225 Watts | 185 Watts/240 Watts |
| Drainage | No plumbing required | |

| DIMENSIONS | | |
|--------------|--------------------|-----------------|
| Height | External 2200mm | Internal 1570mm |
| Width | 1480mm | 1380mm |
| Depth | 745mm | 554mm |
| Floor area | 1.10m ² | |
| Weight | 273kg | |
| Gross volume | 1310L | |

* Depth 695mm excludes removable door handle and door lock bracket

| Dimensional tolerances | | |
|----------------------------------------------------------------------------|-----------------------------|------------------|
| Before installing this cabinet allow the following dimensional tolerances: | | |
| Linear dimensions | Overall cabinet dimensions | |
| Less than 1 metre | ±5mm | |
| More than 1 metre | -5mm to +10mm | |
| | Length of multiple cabinets | |
| | At each joint | At each end wall |
| Less than 1 metre | ±5mm | +15mm |
| More than 1 metre | -5mm to +10mm | +15mm |

| Ventilation requirements | |
|--------------------------|--------------|
| Top | 300mm |
| Sides | Not required |
| Back | Not required |
| Bottom | Not required |

SKOPE Industries Limited reserve the right to alter specifications without notice. Copyright © 2020 SKOPE Industries Limited

SKOPE INDUSTRIES LIMITED

Australian Freephone: 1800 121 535, New Zealand Freephone: 0800 947 5673

Email: skope@skope.com, Website: www.skope.com

PSS0684 Rev.1.0 Oct.2020

