



Icematic introduces a new range of full cube ice machines, with fully electronic functions, that respects the most stringent **anti-pollution parameters** by using **Propane natural gas (R290)**.

Self contained ice maker.

Up to 23kg production per 24/hr of medium ice cube.
7kg storage bin.

Complete with legs, water & drain hoses + 1 ice scoop.
10 AMP power supply.

215 mm drain height including legs to finished floor.



ICE PRODUCTION



Air Cooled Unit

Air Temp.	Water Temperature			
	32°	21°	15°	10°
°C	32°	21°	15°	10°
°F	90°	70°	60°	50°
10°	20	24	26	28
50°	44	53	57	62
21°	18	22	23	25
70°	40	49	51	55
32°	15	19	20	22
90°	33	42	44	49
38°	13	16	17	18
100°	29	35	37	40

Water Cooled Unit

Air Temp.	Water Temperature			
	32°	21°	15°	10°
°C	32°	21°	15°	10°
°F	90°	70°	60°	50°
10°	20	24	26	28
50°	44	53	57	62
21°	19	23	25	27
70°	42	51	55	60
32°	18	22	24	26
90°	40	49	53	57
38°	16	18	20	21
100°	35	40	44	46


CUBE TYPE



20g weight
BRIGHT CUBE
32mm x 35mm x 37mm

The Bright Ice Cube, appreciated for its versatility, is perfect for use in ice buckets, whiskey on the rocks, cocktails and appetisers. The crystal clear appearance of the Bright Cube makes it essential when a high quality is required.

CONTROL PANEL



Start-standby Switch
Status Led

BIN CAPACITY

7 Kg - 15.4 lbs | 350 pcs

DIMENSIONS

W x D x H (mm)

400 x 480 x 600/720



460 x 600 x 850

OPERATING REQUIREMENTS

Rejected Heat 947 W

Air Volume 185 m³/h



220-240/50/1



R290 GWP = 3

MIN

10°C (50°F)



40°C (104°F)

5°C (41°F)



35°C (95°F)

- 10 %



+ 10 %

1 Bar (14 psi)






5 Bar (70 psi)





SPECIFICATIONS

	 ⁺ C -C										
	cond	comp. W	ABS. W	Fuse	kWh/100kg	L / hr	kg	lbs	kg	lbs	Ton CO2 equiv.
CS28+ ZP A		653	310	10	36.6	2.6	30	66	35	77	0
CS28+ ZP W		653	280	10	22.8	38.7	30	66	35	77	0

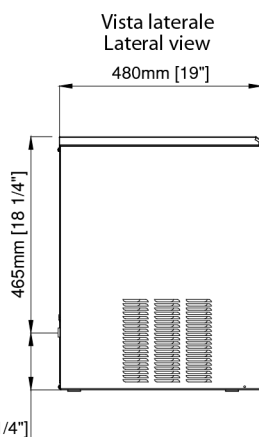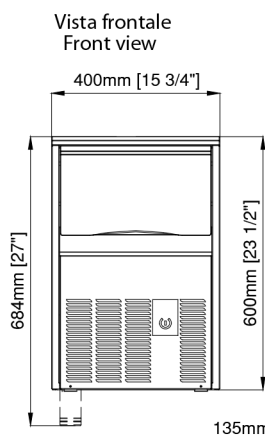

Kit 4 Feet Optional
Kit 4 piedini Optional
Ø50mm H100-120 mm

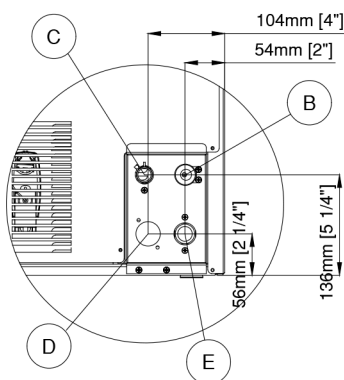

(B) Electrical cable supply / Ingresso alimentazione elettrica

(C) Water outlet connection / Attacco scarico acqua diam. 20 mm

(D) Water outlet connection water condensation / Uscita acqua condensatore ad acqua diam. 20 mm

(E) Water inlet connection / Attacco entrata acqua - 3/4" gas

R290