



Icematic introduces a new range of full cube ice machines, with fully electronic functions, that respects the most stringent **anti-pollution parameters** by using **Propane natural gas (R290)**.

Self contained ice maker.

Up to 38kg production per 24/hr of medium ice cube.
15kg storage bin.

Complete with legs, water & drain hoses + 1 ice scoop.
10 AMP power supply.

266 mm drain height including legs to finished floor.



ICE PRODUCTION



Air Cooled Unit

Air Temp.	Water Temperature			
	32°	21°	15°	10°
°C	90°	70°	60°	50°
10°	34	41	45	46
50°	75	90	99	101
21°	28	34	38	39
70°	62	75	84	86
32°	26	32	36	37
90°	57	71	79	82
38°	22	30	34	35
100°	49	66	75	77

Water Cooled Unit

Air Temp.	Water Temperature			
	32°	21°	15°	10°
°C	90°	70°	60°	50°
10°	32	39	43	44
50°	71	86	95	97
21°	30	36	40	41
70°	66	79	88	90
32°	29	35	39	40
90°	64	77	86	88
38°	24	32	36	37
100°	53	71	79	82


CUBE TYPE



20g weight
BRIGHT CUBE
32mm x 35mm x 37mm

The Bright Ice Cube, appreciated for its versatility, is perfect for use in ice buckets, whiskey on the rocks, cocktails and appetisers. The crystal clear appearance of the Bright Cube makes it essential when a high quality is required.

CONTROL PANEL



Start-standby Switch
Status Led

BIN CAPACITY

15 Kg - 33 lbs | 750 pcs

DIMENSIONS

W x D x H (mm)

500 x 540 x 690/810

560 x 600 x 850

OPERATING REQUIREMENTS

Rejected Heat 1537 W

Air Volume 185 m³/h



220-240/50/1



R290 GWP = 3

MIN

10°C (50°F)



MAX
40°C (104°F)

5°C (41°F)



35°C (95°F)

- 10 %



+ 10 %

1 Bar (14 psi)





5 Bar (70 psi)





SPECIFICATIONS

											
	cond	comp. W	ABS. W	Fuse	kWh/100kg	L / hr	kg	lbs	kg	lbs	Ton CO2 equiv.
CS46 ZP A		1054	480	10	27.9	3.8	38	84	47	104	0
CS46 ZP W		1054	430	10	25.1	37.1	38	84	47	104	0

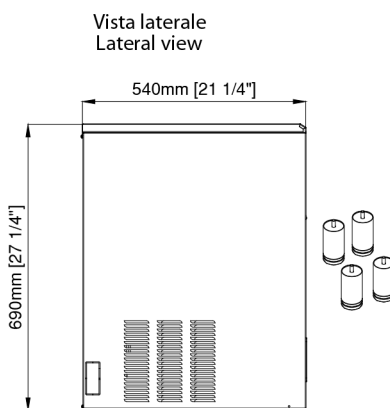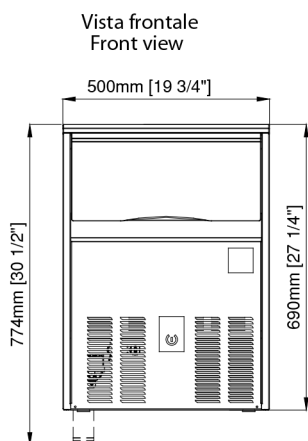

Kit 4 Feet Optional
Kit 4 piedini Optional
Ø50mm H100-120 mm

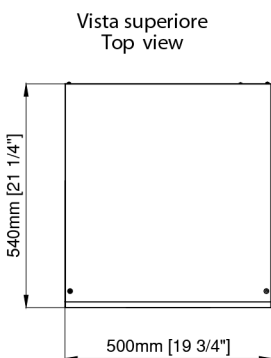

(B) Electrical cable supply / Ingresso alimentazione elettrica

(C) Water outlet connection / Attacco scarico acqua diam. 20 mm

(D) Water outlet connection water condensation / Uscita acqua condensatore ad acqua diam. 20 mm

(E) Water inlet connection / Attacco entrata acqua - 3/4" gas

R290