



Icematic introduces a new range of full cube ice machines, with fully electronic functions, that respects the most stringent **anti-pollution parameters** by using **Propane natural gas (R290)**.

Self contained ice maker.

Up to 63kg production per 24/hr of medium ice cube.  
42kg storage bin.


Complete with legs, water & drain hoses + 1 ice scoop.  
10 AMP power supply.

291 mm drain height including legs to finished floor.




## ICE PRODUCTION



### Air Cooled Unit

Air Temp.	Water Temperature			
				
°C	32°	21°	15°	10°
°F	90°	70°	60°	50°
10°	<b>63</b>	<b>67</b>	<b>69</b>	<b>70</b>
50°	139	148	152	154
21°	<b>57</b>	<b>61</b>	<b>63</b>	<b>65</b>
70°	126	134	139	143
32°	<b>52</b>	<b>56</b>	<b>58</b>	<b>60</b>
90°	115	123	128	132
38°	<b>42</b>	<b>45</b>	<b>47</b>	<b>49</b>
100°	93	99	104	108

### Water Cooled Unit

Air Temp.	Water Temperature			
				
°C	32°	21°	15°	10°
°F	90°	70°	60°	50°
10°	<b>64</b>	<b>71</b>	<b>73</b>	<b>75</b>
50°	141	157	161	165
21°	<b>61</b>	<b>68</b>	<b>70</b>	<b>72</b>
70°	134	150	154	159
32°	<b>59</b>	<b>64</b>	<b>68</b>	<b>70</b>
90°	130	141	150	154
38°	<b>54</b>	<b>59</b>	<b>62</b>	<b>63</b>
100°	119	130	137	139

## CUBE TYPE




### 20g weight BRIGHT CUBE

32mm x 35mm x 37mm

The Bright Ice Cube, appreciated for its versatility, is perfect for use in ice buckets, whiskey on the rocks, cocktails and appetisers. The crystal clear appearance of the Bright Cube makes it essential when a high quality is required.

## CONTROL PANEL




Start-standby Switch  
Status Led


## BIN CAPACITY

42 Kg - 93 lbs | 2100 pcs

## DIMENSIONS

W x D x H (mm)

 700 x 580 x 910/1030

 740 x 640 x 1080

## OPERATING REQUIREMENTS

Rejected Heat 1938 W





Air Volume 310 m<sup>3</sup>/h
















220-240/50/1




R290 GWP = 3

MIN		MAX
10°C (50°F)		40°C (104°F)
5°C (41°F)		35°C (95°F)
- 10 %		+ 10 %
1 Bar (14 psi)		5 Bar (70 psi)



## SPECIFICATIONS

	 cond	 comp. W	 ABS. W	 Fuse	 kWh/100kg	 L / hr	 kg	 lbs	 kg	 lbs	 Ton CO <sub>2</sub> equiv.
<b>CS70 ZP A</b>		1315	620	10	20.9	10.3	53	117	62	137	0
<b>CS70 ZP W</b>		1315	490	10	18.3	45.8	53	117	62	137	0

Vista frontale  
Front view


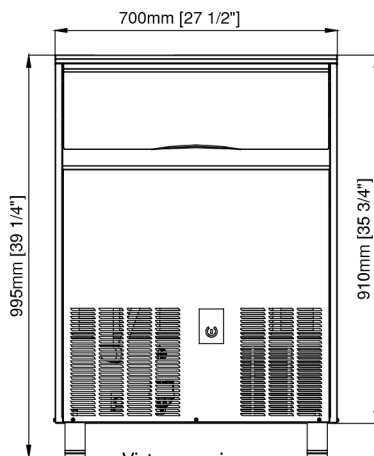


Vista laterale  
Lateral view

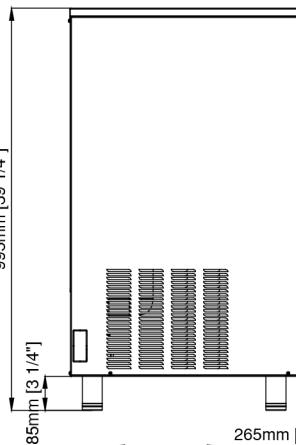

Kit 4 Feet Optional  
Kit 4 piedini Optional  
Ø50mm H100-120 mm

Vista superiore  
Top view



- (B)** Electrical cable supply / Ingresso alimentazione elettrica
- (C)** Water outlet connection / Attacco scarico acqua diam. 20 mm

- (D)** Water outlet connection water condensation / Uscita acqua condensatore ad acqua diam. 20 mm
- (E)** Water inlet connection / Attacco entrata acqua - 3/4"gas

# R290