



Icematic introduces a new range of full cube ice machines, with fully electronic functions, that respects the most stringent **anti-pollution parameters** by using **Propane natural gas (R290)**.

Self contained ice maker.

Up to 79kg production per 24/hr of medium ice cube.
42kg storage bin.

Complete with legs, water & drain hoses + 1 ice scoop.
10 AMP power supply.

291 mm drain height including legs to finished floor.



ICE PRODUCTION



Air Cooled Unit

Air Temp.		Water Temperature			
		32°	21°	15°	10°
°C		21°	15°	10°	
°F		70°	60°	50°	
10°	79	82	84	90	
50°	174	181	185	190	
21°	74	77	79	81	
70°	163	170	174	179	
32°	62	65	67	68	
90°	137	143	148	150	
38°	51	54	56	58	
100°	112	119	123	128	

Water Cooled Unit

Air Temp.		Water Temperature			
		32°	21°	15°	10°
°C		21°	15°	10°	
°F		70°	60°	50°	
10°	81	84	86	88	
50°	179	185	190	194	
21°	77	81	83	85	
70°	170	179	183	187	
32°	73	76	79	82	
90°	161	168	174	181	
38°	70	73	76	79	
100°	154	161	168	174	


CUBE TYPE



20g weight
BRIGHT CUBE
32mm x 35mm x 37mm

The Bright Ice Cube, appreciated for its versatility, is perfect for use in ice buckets, whiskey on the rocks, cocktails and appetisers. The crystal clear appearance of the Bright Cube makes it essential when a high quality is required.

CONTROL PANEL



Start-standby Switch
Status Led

BIN CAPACITY

42 Kg - 93 lbs | 2100 pcs

DIMENSIONS

W x D x H (mm)

700 x 580 x 910/1030

740 x 640 x 1080

OPERATING REQUIREMENTS

Rejected Heat 1770 W

Air Volume 310 m³/h
















220-240/50/1




R290 GWP = 3

MIN		MAX	
10°C (50°F)		40°C (104°F)	
5°C (41°F)		35°C (95°F)	
- 10 %		+ 10 %	
1 Bar (14 psi)		5 Bar (70 psi)	



SPECIFICATIONS

	 cond	 comp. W	 ABS. W	 Fuse	 kWh/100kg	 L / hr	 kg	 lbs	 kg	 lbs	 Ton CO2 equiv.
CS90 ZP A		1065	670	10	21.6	9.07	54	119	63	139	0
CS90 ZP W		1065	580	10	16.3	47.6	54	119	63	139	0

Vista frontale
Front view


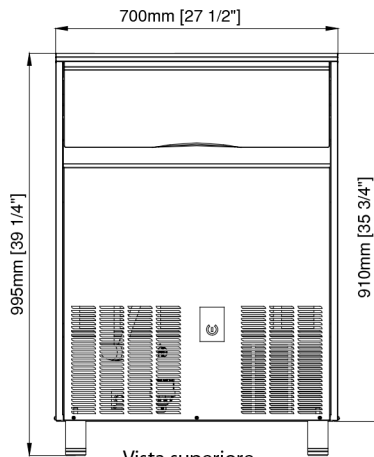


Vista laterale
Lateral view

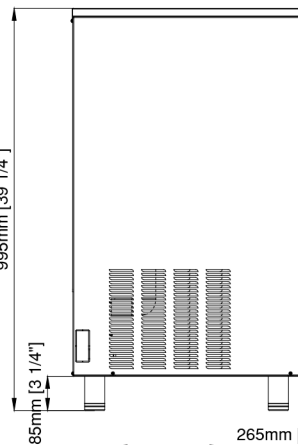

Kit 4 Feet Optional
Kit 4 piedini Optional
Ø50mm H100-120 mm

Vista superiore
Top view



- B** Electrical cable supply / Ingresso alimentazione elettrica
- C** Water outlet connection / Attacco scarico acqua diam. 20 mm

- D** Water outlet connection water condensation / Uscita acqua condensatore ad acqua diam. 20 mm
- E** Water inlet connection / Attacco entrata acqua - 3/4"gas

R290