

Glass Door Merchandisers

Refrigerators

Model : FRS-1000R

SLIDING DOOR MERCHANDISER

____FEATURES & BENEFITS ____

Energy conserving fan control

Utilizing algorithmic air circulation for optimal temperature levels, our innovative fan control system conserves energy by at least 15% and increases compressor life by up to 30%.

LED advertising panel

LED lighting offers 5 times longer lasting life than fluorescents and conserves energy as well.

LED lighting interior

Brighter and longer lasting LED lights provide attractive, enhanced illumination compared to fluorescents. It saves energy by producing less heat, while maximizing the visibility in the display area.

Double pane glass doors with Low-E glass

Energy saving double pane glass doors are equipped with Low-emissivity glass, which reduce outer heat gain and decrease energy consumption. It enhances energy efficiency and minimizes condensation. Lightweight door construction also reduce door maintenance and bushing wear, which in turn facilitates smoother door openings.

Efficient refrigeration system

Turbo Air's glass door refrigerators are designed with oversized and balanced (CFC Free R-134A) refrigeration systems. These include efficient evaporators and condensers for faster cooling and greater efficiency.

- Adjustable, heavy duty, PE (polyethylene) coated wire shelves
- Bottom mount compressor unit
- Ergonomically designed doors with easy grip handles
- Magnetic door gasket
- High-density polyurethane insulation
 The entire cabinet structure is foamed-in-place using high density, CFC free polyurethane insulation.



Refrigerator holds 33°F ~ 38°F for the best in beverage preservation

						construction (Intertek	NSE CON ENERGY STAR® Qualified
Model	Sliding Door	CU./FT.	#of Shelves	HP	AMPS	Crated Weight (lbs.)	$L \ge D^* \ge H$ (inches)
FRS-1000R	2	35	8	1/2	10.9	419	413/8 x 30 x 791/8

Ver.201602

* Depth does not include 3/4" for door handle

SLIDING DOOR MERCHANDISER

Model : FRS-1000R

ELECTRICAL DATA					
Voltage	240/50/1				
Full Load Amperes	10.9				
Compressor HP	1/2				
Cord Length (ft.)	6				
Refrigerant	R-134A				
DIMENSIONAL DATA					
# of Doors	2				
Net Capacity (cu. ft.)	35				
Ext. Length Overall (in.)	413/8 (1052mm)				
Ext. Depth Overall (in.)*	30 (762mm)				
Ext. Height Overall (in.)	791/8 (2010mm)				
Int. Length Overall (in.)	377/8 (960mm)				
Int. Depth Overall (in.)	241/2 (622mm)				
Int. Height Overall (in.)	611/4 (1556mm)				
Net Weight (lbs.)	410				
Gross Weight (lbs.)	419				
# of Shelves	8				
Shelf Size (L x D) (in.)	18 x 233/8				
Bottle Capacity (Full/Load line)	420 / 336				

Design and specifications subject to change without notice.

Actual shipping weight may differ due to extra packing materials for product protection. * Depth does not include 3/4" for door handle.

White color cabinet & black color frame on door


■ 4" dia. casters are available (optional)

OPTIONAL ACCESSORIES :


- 4" caster, 1/2" diameter & 13 TPI: G8F6500101 (non-brake), G8F6500201 (w/ brake)
- Additional PE coated wire shelf: 30278A0207 (LED unit)

PLAN VIEW

(unit : inch)



PLAN VIEW

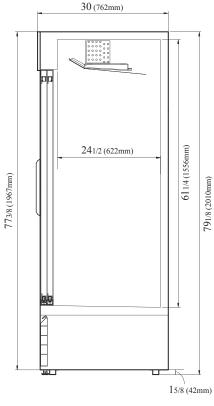

SIDE VIEW

AUSTRALIA BRANCH

TURBO AIR PTY LTD www.turboairinc.com.au 1st Floor, Building E 10 Highgate St, Auburn NSW 2144 Australia T. 02 9737 9881

