


specifications

TME650-A Series

Top Mount ActiveCore
One Door Upright Chiller

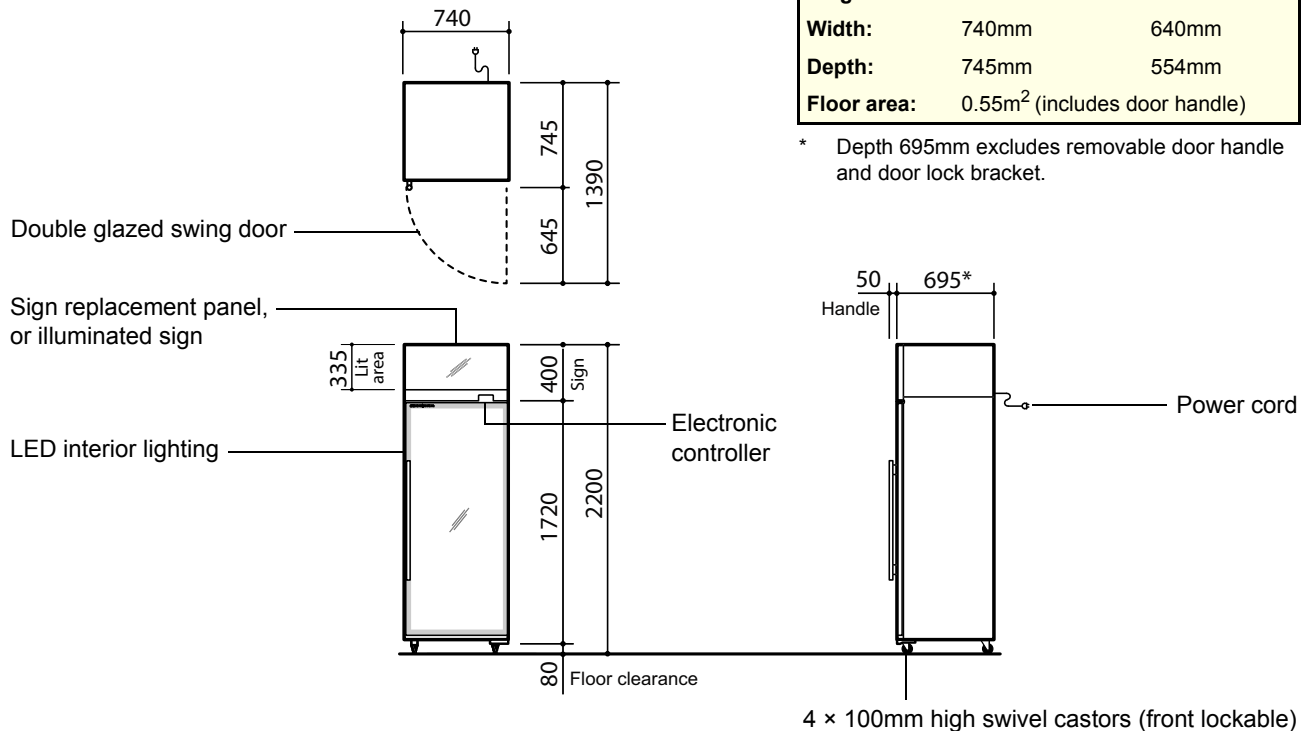

Copyright © 2016 SKOPE Industries Limited

GENERAL SPECIFICATIONS	
Temperature range	1°C to 4°C (adjustable up to 15°C)
Climate class	5 (Tested at 43°C)
Door	Lockable, self-closing, reversible, double glazed, single Low-E, argon filled, toughened safety glass swing door (hinged RH)
Internal Volume	610 litres
Interior lighting	1 × 22W T8 LED tube (Ø26mm × 1500mm) side light
Shelves	5 adjustable height wire shelves: 625mm wide × 470mm deep
Power supply	220-240 Volts a.c. 50 Hz, single phase supply. Supplied with 10 Amp 3-Pin plug
Current draw	3.5 Amps (includes unit 2.9 Amps)
Refrigeration system	Removable ActiveCore top mount refrigeration unit (UTHCCI-0002)
Refrigerant	R134a / 380g
Nominal capacity	836 Watts
Controller	Carel S4 electronic controller
Drainage	No plumbing required
Weight	170 kg

INDIVIDUAL SPECIFICATIONS		
Model	TME650-A	TME650-AC
Part number	SM65GV	SM65BV
Sign	Sign replacement panel	400mm high illuminated sign
Sign lighting	n.a.	1 × 11W T8 LED tube (Ø26mm × 600mm)

SKOPE Industries Limited reserve the right to alter specifications without notice.

PSS0470 Rev. 2.0 Apr. 2017



SKOPE INDUSTRIES LIMITED

Australian Freephone: 1800 121 535, New Zealand Freephone: 0800 947 5673

Email: skope@skope.co.nz, Website: www.skope.com

