


specifications

TME650N-A Series

ActiveCore Series, 1 Door (Glass), Upright Fridge

Project: _____

Item No: _____

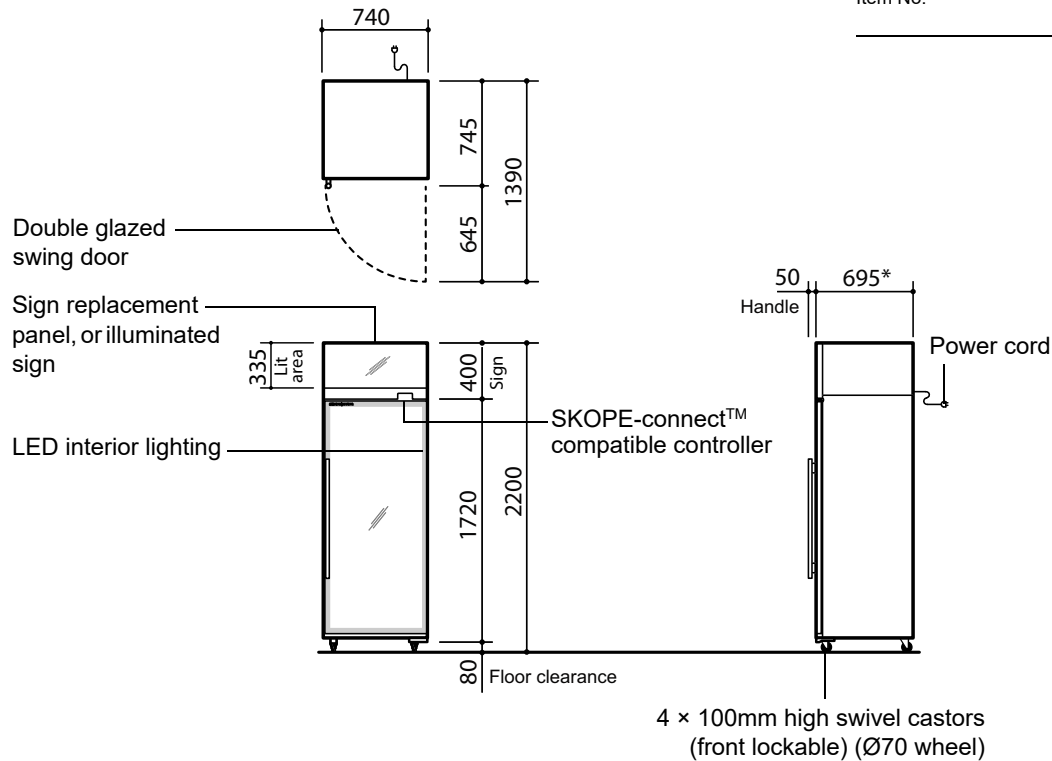

CABINET	
Model ID	TME650N-A TME650N-AC
Doors	1 x self-closing, reversible, double glazed, single Low-E, lockable, argon filled, toughened safety glass swing door (hinged RH)
Internal door opening	1 x door openings: 1570mm high x 620mm wide
Shelves	5 x adjustable height wire shelves: 625mm wide x 470mm deep
Sign	Sign replacement panel Illuminated sign
Material	Powdercoat galvanized steel
PERFORMANCE	
Max. ambient temp.	40°C
Temperature range	1°C to 4°C (adjustable via SKOPE-connect 1°C to 15°C)
GEMS class	M1 M1
GEMS energy consumption	2.36 kWh/24h 2.46 kWh/24h
GEMS annual running cost	\$258 p.a. (@ \$0.30/kWh) \$269 p.a. (@ \$0.30/kWh)
ELECTRICAL	
Electrical safety climate class	5
Interior side lighting	1 x 1400mm, 15W LED 1 x 1400mm, 15W LED
Sign lighting	n.a. 1 x 670mm, 7W LED
Power cord	Supplied with 2.3m, 10 Amp plug and lead
Power supply	220-240 Volts a.c. 50 Hz, single phase supply
Current draw	2.9 Amps (includes unit 2.6 Amps)
REFRIGERATION	
Controller	SCS Connect (SKOPE-connect™ compatible)
Connectivity interface	Bluetooth
Refrigeration system	Top mounted, integral, removable ActiveCore refrigeration unit (UTHCNI-0010)
Refrigerant	R290 / 99g (natural refrigerant)
Nominal capacity	740 Watts
Heat rejection (Avg/peak)	105 Watts/150 Watts
Drainage	No plumbing required

DIMENSIONS		
	External	Internal
Height	2200mm	1570mm
Width	740mm	640mm
Depth	745mm	554mm
Floor area	0.55m ²	
Weight	170kg	
Gross volume	610L	

* Depth 695mm excludes removable door handle and door lock bracket

Dimensional tolerances		
Before installing this cabinet allow the following dimensional tolerances:		
Linear dimensions	Overall cabinet dimensions	
Less than 1 metre	±5mm	
More than 1 metre	-5mm to +10mm	
	Length of multiple cabinets	
	At each joint	At each end wall
Less than 1 metre	±5mm	+15mm
More than 1 metre	-5mm to +10mm	+15mm

Ventilation requirements	
Top	300mm
Sides	Not required
Back	Not required
Bottom	Not required

SKOPE Industries Limited reserve the right to alter specifications without notice. Copyright © 2018 SKOPE Industries Limited

PSS0517 Rev. 2.4 Jul. 2020

SKOPE INDUSTRIES LIMITED

Australian Freephone: 1800 121 535, New Zealand Freephone: 0800 947 5673

Email: skope@skope.com, Website: www.skope.com

