


# specifications

## RF7.UPF.2.SD

ReFlex Series, 2 Door (Solid), Upright Freezer (R290)

Project: \_\_\_\_\_

Item No: \_\_\_\_\_

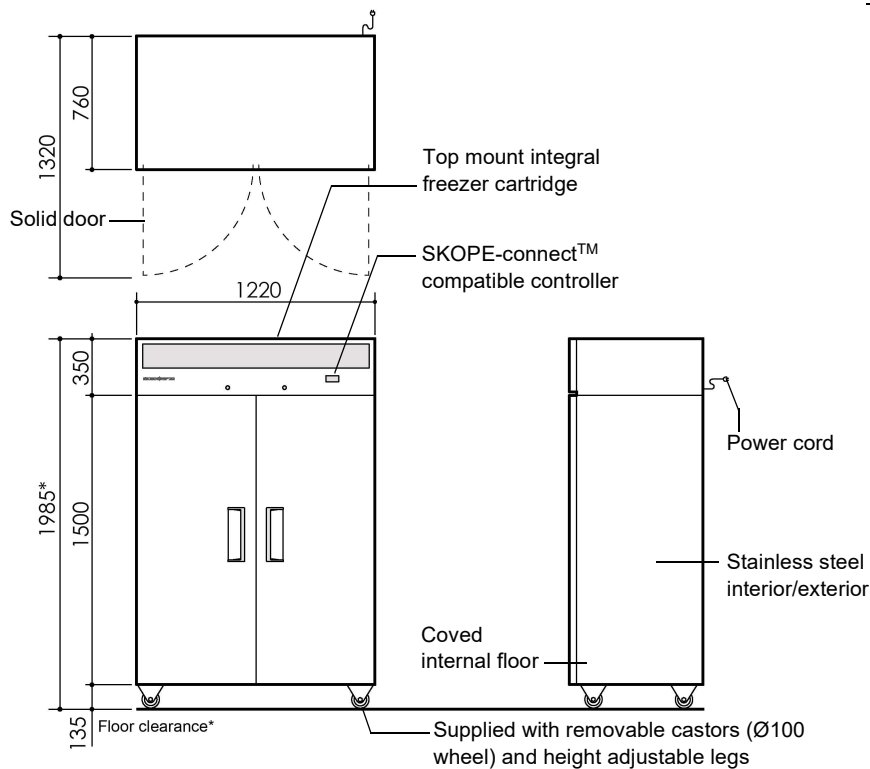

### CABINET

Doors	2 × self-closing, lockable, solid swing doors. LH, RH
Internal door opening	2 × door openings: 1375mm high × 495mm wide
Shelves	10 × adjustable height shelves: 530mm wide × 530mm deep
Worktop	n.a.
Material	304 AISI stainless steel interior and exterior

### PERFORMANCE

Max. ambient temp.	40°C
Temperature range	-21°C to -18°C (adjustable with SKOPE-connect -26°C to -12°C)
GEMS class	5L1
GEMS energy consumption	10.64 kWh/24h
GEMS annual running cost	\$1165 p.a. (@ \$0.30/kWh)

### ELECTRICAL

Electrical safety climate class	5
Interior lighting	2 × 1200mm, 12W LED light (door activated)
Power cord	Supplied with 2.9m, 10 Amp plug and lead
Power supply	220-240 Volts a.c. 50 Hz, single phase supply
Current draw	5.0 Amps (includes unit 4.6 Amps)

### REFRIGERATION

Controller	SCS Connect (SKOPE-connect™ compatible)
Connectivity interface	Bluetooth® wireless technology
Refrigeration system	Top mounted, integral, removable freezer cartridge (part number UTKDNI-0037)
Refrigerant	R290 / 105g (natural refrigerant)
Nominal capacity	725 Watts
Heat rejection (Avg/peak)	450 Watts/725 Watts
Drainage	No plumbing required

### DIMENSIONS

	External	Internal
Height	1985mm*	1395mm
Width	1220mm	1100mm
Depth	760mm	600mm
Floor area	0.93m <sup>2</sup>	
Weight	171kg	
Gross volume	921L	
Net volume	712L	

\* With supplied castors fitted. See height variation below

#### Height variation

Supplied castors	1985mm
Supplied height adjustable legs	1995-2035mm
No castors or legs	1850mm

#### Dimensional tolerances

Before installing this cabinet allow the following dimensional tolerances:

Linear dimensions	Overall cabinet dimensions	
Less than 1 metre	±5mm	
More than 1 metre	-5mm to +10mm	
	Length of multiple cabinets	
	At each joint	At each end wall
Less than 1 metre	±5mm	+15mm
More than 1 metre	-5mm to +10mm	+15mm

#### Ventilation requirements

Top	300mm
Sides	Not required
Back	Not required
Bottom	Not required

SKOPE Industries Limited reserve the right to alter specifications without notice. Copyright © 2020 SKOPE Industries Limited

### SKOPE INDUSTRIES LIMITED

Australian Freephone: 1800 121 535, New Zealand Freephone: 0800 947 5673

Email: skope@skope.com, Website: www.skope.com

PSS0679 Rev. 1.4 Aug. 2020