

specifications

OD260

Open Deck Fridge


CABINET DIMENSIONS

	External	Internal
Height:	1400mm	850-910mm
Width:	650mm	565mm
Depth:	735mm	495-595mm
Floor area:	0.48m ² (includes rear spacer)	
Gross volume	230L	

Dimensional tolerances

Before installing this cabinet allow the following dimensional tolerances:

Linear dimensions	Overall cabinet dimensions	Length of multiple cabinets	
		At each joint	At each end wall
Less than 1 metre	±5mm	±5mm	+15mm
More than 1 metre	-5mm to +10mm	-5mm to +10mm	+15mm

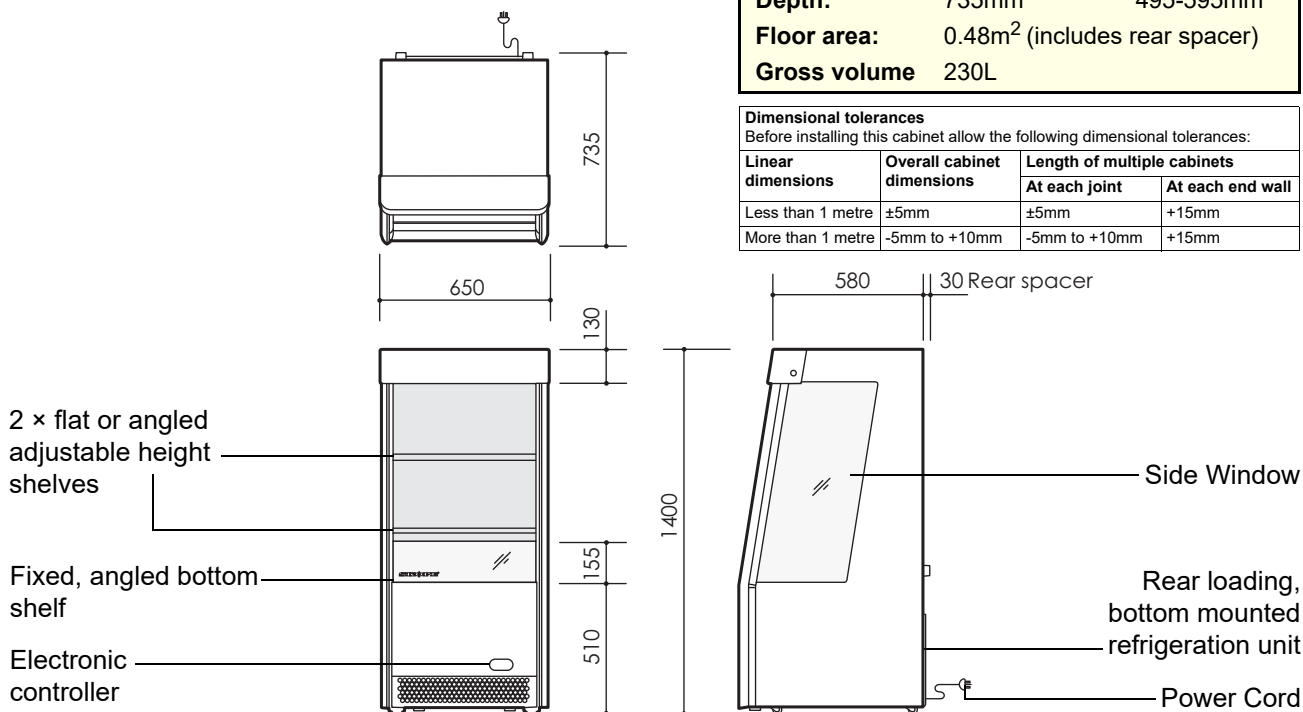

CABINET SPECIFICATIONS

Doors:	n.a.
Shelves:	2 x adjustable height shelves and 1 x fixed bottom shelf. Top shelf: 545mm wide x 296mm deep. Middle shelf: 545mm wide x 371mm deep. Bottom shelf: 545mm wide x 442mm deep.
Weight:	140kg
Electrical safety climate class	3
Internal lighting:	2 x 9 Watt LED strip side lights (18 Watts total)
Sign lighting:	n.a.
Electrical:	220-240 Volts a.c. 50 Hz, single phase supply, 3.2A (includes unit 3.0A)
Temperature range:	1°C to 5°C (2°C to 4°C product mass average)
GEMS class	M1
GEMS energy consumption	8.30 kWh/24h
GEMS annual running cost	\$909 p.a. (@ \$0.30/kWh)
Refrigeration system:	Electronically controlled, bottom mounted SKOPE refrigeration unit (unit part number UB89ABF)
Electronic controller:	Carel S4 Evo
Refrigerant:	R134a / 420g
Nominal capacity:	815 Watts
Drainage:	No plumbing required

SKOPE Industries Limited reserve the right to alter specifications without notice. Copyright © 2017 SKOPE Industries Limited

PSS0498 Rev. 1.2 Mar. 2021



SKOPE INDUSTRIES LIMITED

New Zealand Freephone: 0800 947 5673, Australian Freephone: 1800 121 535

Email: skope@skope.com Website: www.skope.com

