

• 'ES50' •

High Performance Pass Through Dishwasher

In-Line or Corner Feed, Easy-glide Hood with Wraparound Handle



ESTABLISHED 1932

ESWOOD

PROUDLY AUSTRALIAN MADE

The professionals in integrated
glass and dishwashing systems

www.goldsteineswood.com.au

• 'ES50' High Performance Pass Through Dishwasher •

Efficient & Compact • Simple, Convenient & Safe Automatic Operation

Outstanding Performance:

The all new Eswood 'ES50' dishwashing machine offers outstanding continuous performance within compact dimensions to satisfy the needs of today's busier commercial kitchens which are catering for around 250 seats.


Efficient Ergonomic Design:

Bench height pass-through operation ensures safe transfer of loaded racks into and out of the wash chamber, while producing an efficient and convenient workflow pattern suitable for in-line or corner feed layouts. Opening and closing the hood has been made even easier with the addition of a wraparound handle and Eswood's exclusive low friction, wear resistant, copolymer guides and pivot bushes.



Quality Endorsed Company

Head Office
ISO9001 Lic 2900
SAI Global

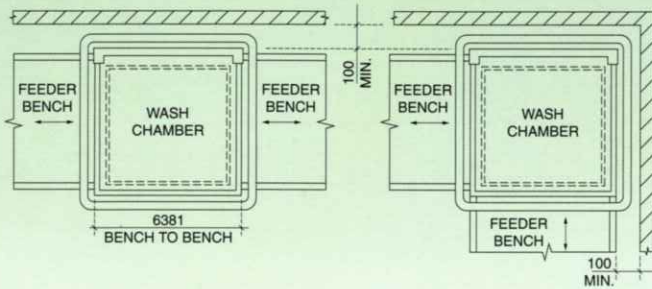

In-Line Operation

Corner Operation

User Friendly Automatic Operation: Lift the hood, slide in a loaded rack and close the hood to begin the fully automatic wash/rinse cycle. Should the hood be opened, the machine stops automatically. A reliable and accurate solid state timer provides a choice of three cycle times. The easy to read digital display thermometers, cycle status indication lights and cycle selection controls are conveniently and safely located at the front of the machine, and clearly marked.

Powerful and Hygienic Wash and Rinse Systems:

Completely independent upper and lower spray arms are provided for both the wash and rinse systems. An auto spin drain system on the upper wash arm prevents suds from dripping during rinse cycles. Powerful independent wash and rinse pumps combine with the thermostatically controlled booster heaters to produce a first class wash and rinse every time whilst maintaining minimal cycle times. Wash and rinse supply tanks have convenient automatic fill and low water protection.

Guaranteed Quality Construction and Reliable Performance:

Eswood's reputation for product reliability is second to none. Only the finest stainless steel, non-ferrous and durable synthetic materials are used. All Eswood products are fully guaranteed and backed by our national support network. The 'ES50' is in accordance with ANZFA health regulations and conforms to Australian Standards for Plumbing Safety.

Model 'ES50' Machine Specifications

Hourly Capacity	1080 pieces tableware/hour
Wash Cycle Times	Fixed (60, 80 and 100 seconds)
Dwell/Rinse Cycles	5 seconds/13 seconds
Standard Equipment	2 x Plate Racks, 1 x Cup Rack, (500 x 500mm racks)
	2 Cutlery Containers

Wash Pump, Tank & Element

Wash Pump Motor	1000 watts
Wash Pump Capacity	700 litres/minute
Wash Tank Capacity	45 litres
Wash Tank Heater	2800 watts
Water Temperature	60° - 70°C


Rinse Pump, Tank & Element

Rinse Pump Motor	370 watts
Rinse Tank Capacity	12 litres
Rinse Tank Heater	8400 watts
Water Temperature	83°C
Water Consumption	4 litres per cycle

Electrical & Water Connections

Electrical Input	415V/50Hz/3N/10.3kW max
Hot Water Input	65°C min. @ 100 to 400 kPa
Net Weight	130 kg

- A. Drain Outlet 2" BSP.
- B. Hot Water Supply Inlet 1/2" BSP. 65°C min. at 100 to 400 kPa. (15 to 56 psi).
- C. Electrical Connection, 3 phase and neutral.

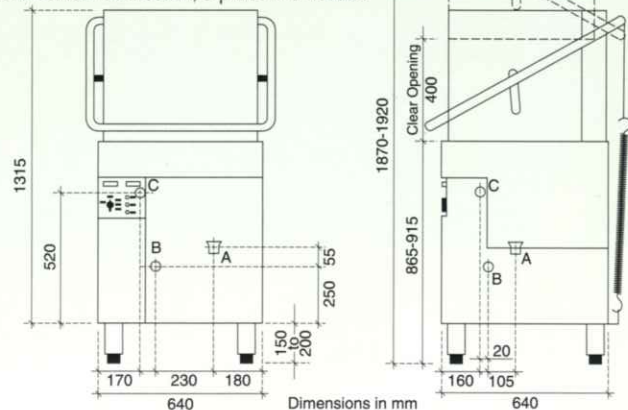

Dimensions in mm

Goldstein



ESWOOD

ABN 74 000 100 845 - ABN 87 002 481 521

Group Sales: 211-213 Woodpark Rd, Smithfield NSW 2164
Telephone (02) 9604 7333 Facsimile (02) 9604 5420
Vic (03) 9553 1355. Qld (07) 3891 1466.
SA (08) 8238 3423. WA (08) 9456 0559.

Proudly Distributed by

Goldstein Eswood continually strive to improve all of our products, therefore specifications may be amended from those printed in this brochure without notice. Publication ESW8530.0606